


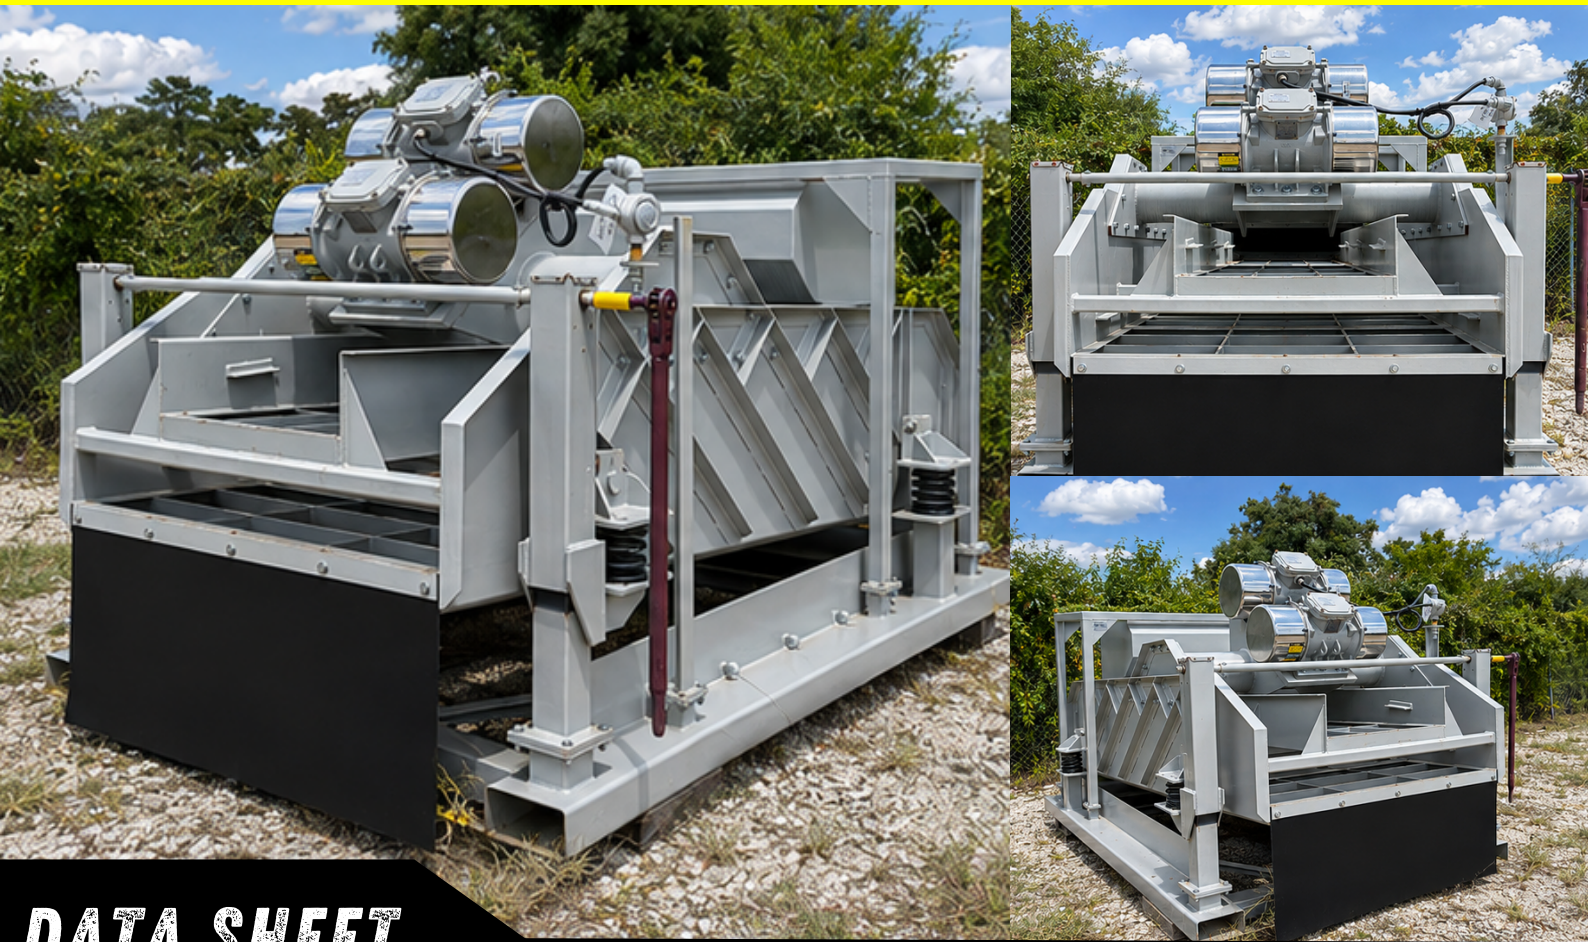

DATA SHEET

SPECIFICATIONS

WEIGHT	6000 lbs.
LENGTH	8 ft. 6 in.
WIDTH	6 ft.
HEIGHT	5 ft. 4 in.
PROCESS RATE	1000 GPM
TOTAL SCREENING AREA	52 ft ²
# OF SCREENS	6
SCREEN TYPE	Pre-tensioned
SCREEN SIZE	25.13" x 49.3"

➤ Available in XP or NON-XP
Skids can be customized for effortless integration

-  **DUAL VIBRATORY MOTORS** FOR CONSISTENT, HIGH-PERFORMANCE SCREENING
-  **DOUBLE-DECK SCREENING** FOR INCREASED SCREENING CAPACITY AND MORE EFFICIENT SOLIDS SEPARATION
-  **ADJUSTABLE DECK ANGLE** FOR OPTIMIZED MATERIAL FLOW AND SEPARATION
-  **SKID-MOUNTED DESIGN** FOR EASY INSTALLATION AND INTEGRATION
-  **HEAVY-DUTY ISOLATION SPRINGS** REDUCE VIBRATION TRANSFER TO THE SUPPORTING STRUCTURE FOR SMOOTHER, MORE STABLE OPERATION.

TRIFLO INTERNATIONAL RESERVES THE RIGHT TO MAKE CHANGES IN ENGINEERING, DESIGN AND SPECIFICATIONS; ADD IMPROVEMENTS; OR DISCONTINUE MANUFACTURING AT ANY TIME WITHOUT NOTICE OR OBLIGATION. EQUIPMENT AND DEPICTIONS SHOWN ARE FOR ILLUSTRATIVE PURPOSES ONLY AND MAY DISPLAY OPTIONAL ACCESSORIES OR COMPONENTS SPECIFIC TO CERTAIN MARKETS OR REGIONS.
© 2026 TRIFLO INTERNATIONAL. ALL RIGHTS RESERVED. PRINTED IN THE U.S.A. PLEASE RECYCLE